

## 780nm Frequency Stabilized Laser

Based on Precilasers' narrow-linewidth 780nm laser and all-fiber rubidium frequency-stabilized module, the 780nm frequency-stabilized laser can output narrow-linewidth laser output with good long-term stability, which can be applied to fields such as industrial precision measurement.

### Features

- Narrow Linewidth
- Linear Polarization
- High Power
- Active Power Stabilization
- Excellent Beam Quality
- Never Mode-hop
- Resistant to high and low temperature and vibration working environment

### Application

- Precision Measurement




Specification		
Partnumber	FL-SF-780-XX <sup>(1)</sup> -MTS	
Center Wavelength	780.24nm <sup>(2)</sup>	
Output Power	>10mW	>100mW
Power Adjustment Range	10-100%	
Linewidth (100us integral) <sup>(3)</sup>	<20kHz	
Frequency Stability	Rubidium Atomic Frequency Stabilization, 10ppb@1hrs, <1ppb@30s	
Long Term Power Stability	<0.75% @3hrs, RMS	
Output Mode	Single-mode polarization-maintaining fiber output, FC/APC Connectors	
Beam Quality	$M^2 < 1.1$	
Polarization Extinction Ratio	>23dB, Linear polarization	
Cooling	Air Cooling	
Temperature	15-30°C	
Power Supply	100-240V, AC, 50/60Hz	
Power Consumption	<100W	
Weight	<35kg	

(1)X: Laser power, in W, e.g. output power0.1W: FL-SF-780-0.1-MTS

(2)For other central wavelengths, please contact us by email

(3)Fiber-optic delay interferometer test

## ❖ Product Dimensions

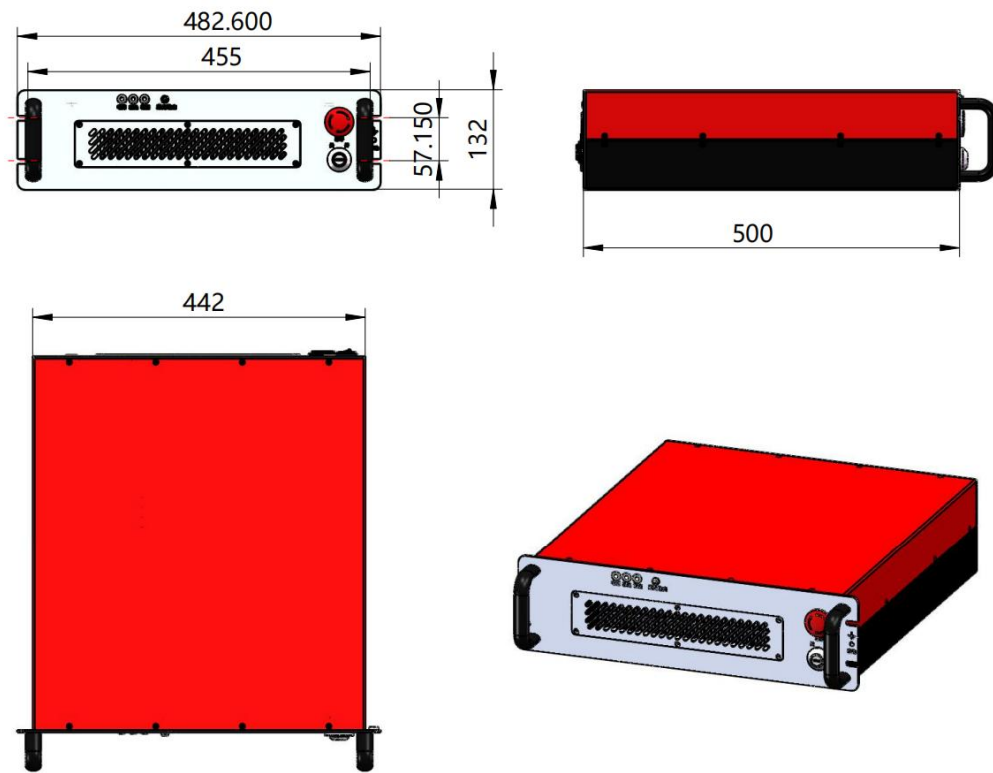

Shanghai Precilasers Technology Co., Ltd.  
Floor 2, Building 2, No. 1918, Xupan Road, Jiading  
District, Shanghai  
021-59160265

[info@precilasers.com](mailto:info@precilasers.com) | [www.precilasers.com](http://www.precilasers.com)



### ⚠ Laser Hazard

Visible or invisible laser radiation, avoid eye or skin exposure to direct, reflected or filtered radiation.  
**CLASS 4 Laser Products**

