


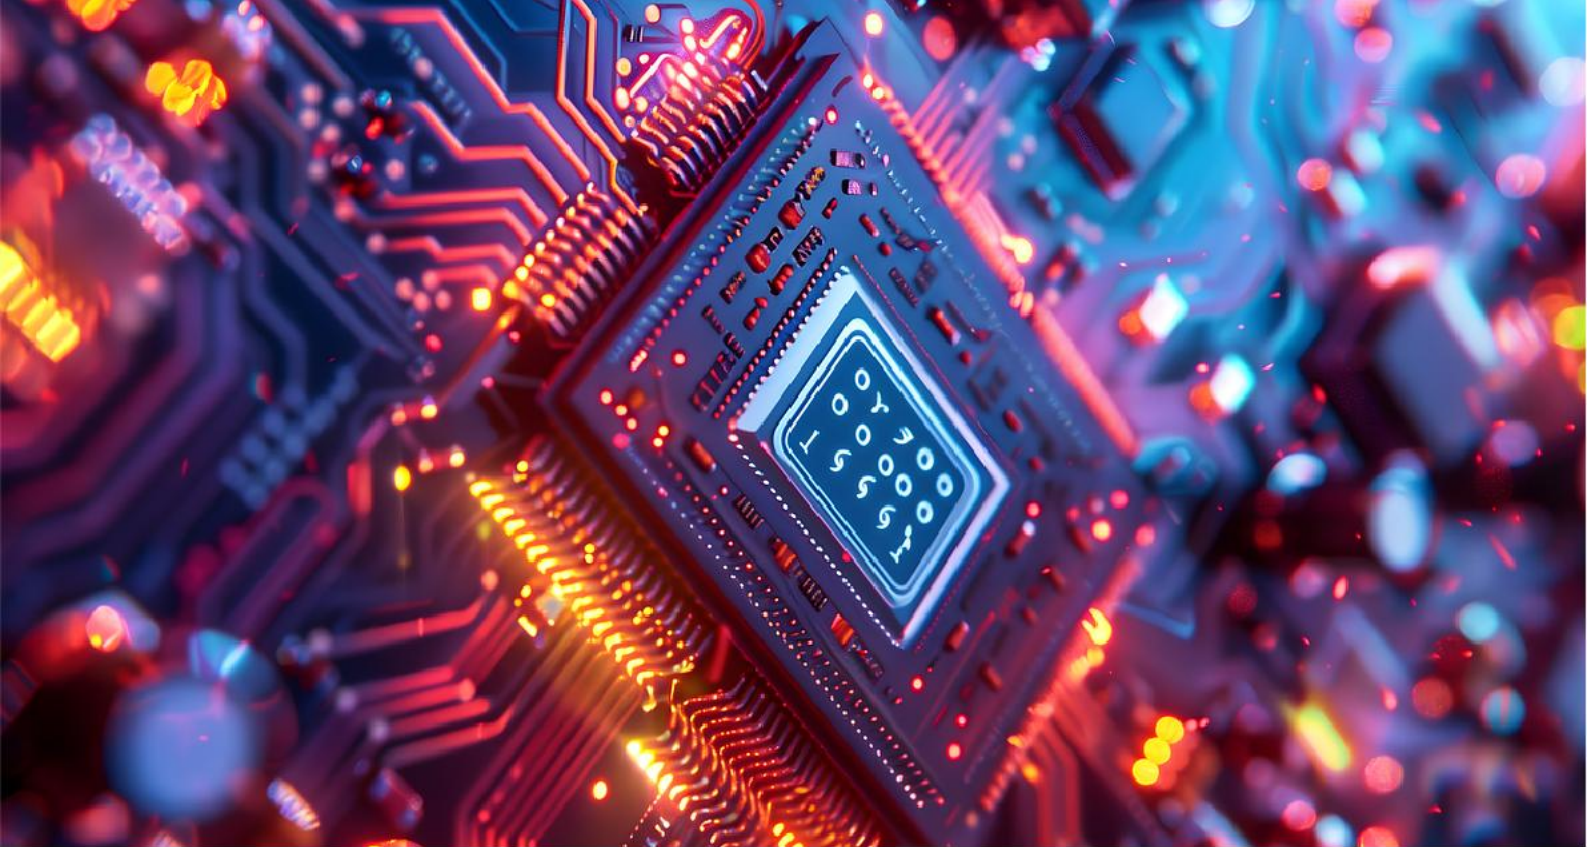

633nm/775nm Frequency Swept Laser

Precilasers' swept frequency 633nm/775nm laser can achieve ultra-wide range of non-mode-hopping linear frequency sweeping. It has the advantages of full digital, high linearity, high power, and larger frequency hopping range. It is used in industrial precision measurement, interferometer and other fields.

Features

- Narrow Linewidth
- Tunable, Linear Polarization
- Active Power Stabilization
- Never Mode-hop
- Large Frequency Hopping Range






Applications


- Precision Measurement
- Interferometer

Specification						
Partnumber	FL-SF-XX-SWT (Wavelength can be customized)					
Center Wavelength	633nm			775nm		
No Mode Hopping Frequency Sweep Range	>80GHz	>120GHz	>200GHz	>100GHz	>200GHz	>350GHz
Output Power	>10mW	>40mW		>10mW	>40mW	
Single Step Adjustment Accuracy	< 1MHz					
Single Step Length	1MHz-10GHz					
Single Step Interval	4ms-400ms					
Power Adjustment Range	10-100%					
Linewidth (100 us integration)	< 300KHz			< 400KHz		
Long Term Power Stability	<0.75% @3hrs, RMS					
Output Mode	Single-mode polarization-maintaining fiber output, FC/APC connector					
Beam Quality	TEM ₀₀ , M²<1.1					
Polarization Extinction Ratio	>20dB,Linear, Vertical					
Cooling	Air Cooling					
Warm-up Time						
Cold Start	<30 minutes					
From Standby	<5 minutes					
Dimensions & Weights						
Laser Controller Dimensions	≤485mm x 309.5mm x 132mm					
Laser Controller Weight	≤20kg					
Output Fiber Length	> 2m (Customizable)					
Operating Environment & Power Supply						
Temperature (No condensation conditions)	15-30 °C (Air Cooling)					
Power Supply	100V-240V, AC, 50/60Hz					
Power Consumption	<100W					
Communication	Ethernet/RS422					

❖ Product Dimensions

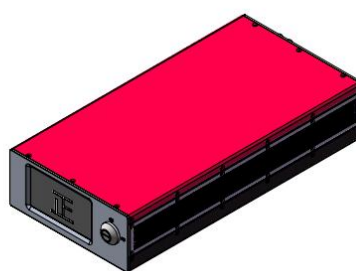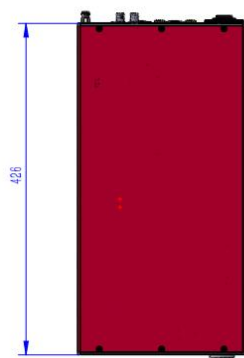


Chassis Dimensions

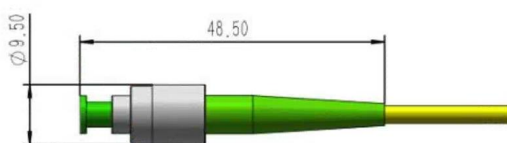


FC/APC Connector Dimensions


❖ Performance(typical value)

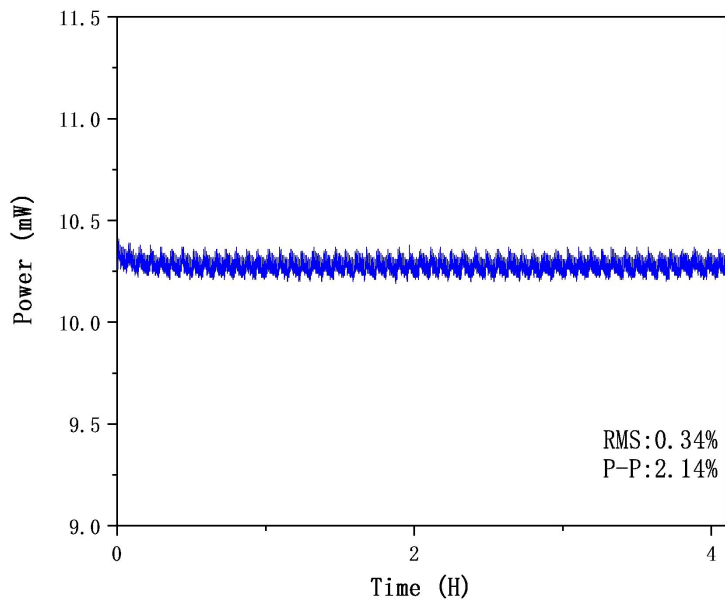

Continuous frequency sweep output power stability

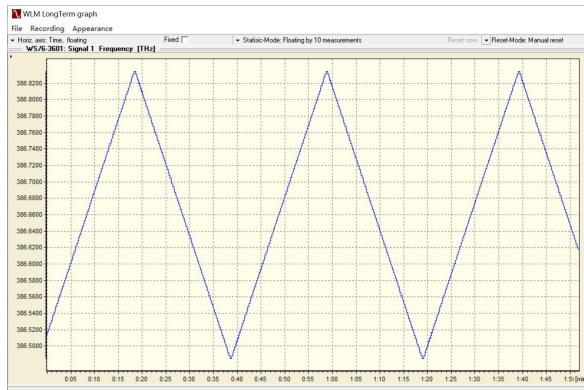

Continuous frequency sweep 350GHz

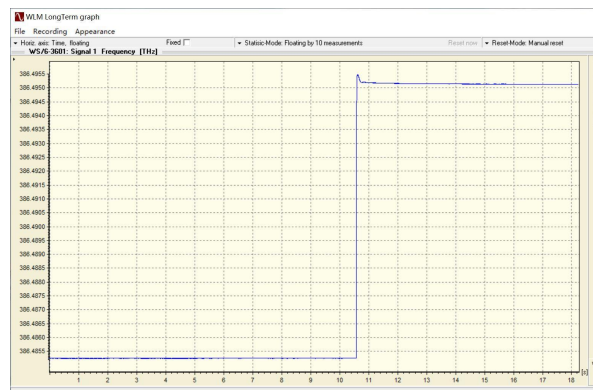

Laser single step frequency hopping 10GHz



Shanghai Precilasers Technology Co., Ltd.
 Floor 2, Building 2, No. 1918, Xupan Road, Jiading
 District, Shanghai
 021-59160265

info@precilasers.com | www.precilasers.com



⚠ Laser Hazard

Visible or invisible laser radiation, avoid eye or skin exposure to direct, reflected or filtered radiation.
CLASS 4 Laser Products

